



Premium Building Products
That Protect

P A T E N T E D

Protecto Premium Dual Guard Threshold Tape™



The Ultimate Protection from Air and Moisture Infiltration under the Threshold.

For years door manufacturers have been blamed for having entry door systems that need constant adjustments so they can open and close properly. The fact is, in a majority of the cases, the major cause of adjustments is due to moisture and the possibility of black mold infiltrating into the sub-floor. This not only causes swelling and warpage of the sub-floor and structural framing but also racks the door frame out of square. Once this happens the door will need constant adjustments not to mention the additional areas for air and black mold to infiltrate a home.

Protecto Wrap Company's New **Protecto Premium Dual Guard Threshold Tape™** with its unique patented flange acts like a gasket, sealing off the sub-floor and preventing air and moisture infiltration under the threshold. This will help keep the door frame from racking and the sub-floor from swelling and warping.

ADVANTAGES:

- Exceeds all building codes and manufacturers installation specifications
- Energy efficient to reduce monthly utility costs
- Helps stop air, moisture and bug infiltration under the threshold
- Adheres to concrete, wood and metal surfaces
- Helps prevent sub-floors from swelling and structural framing from warping
- Helps stop entry/patio doors from racking and costly call backs for additional adjustments
- Self adhering for precise placement and easy application
- 100% waterproof, mold and mildew resistant
- Designed for all entry/patio doors



Premium Building Products
That Protect

Protecto Premium Dual Guard Threshold Tape™



APPLICATION:

- All surfaces must be clean, dry, free of dirt and other foreign materials.
- Cut a piece of **Protecto Premium Dual Guard Threshold Tape™** the length of the threshold opening extending approximately 1" minimum up the sides of the door jam.
- Peel off release liner and begin applying **Protecto Premium Dual Guard Threshold Tape™** to the door sill plate by smoothing as the adhesive comes into contact with the door sill.
- Place the threshold over the **Protecto Premium Dual Guard Threshold Tape™** and secure.

Note: **Protecto Premium Dual Guard Threshold Tape™** eliminates the need for caulking.

INSTALLATION BELOW 40°:

- Keep **Protecto Premium Dual Guard Threshold Tape™** in a warm heated space above 60°F before use.
- Prime the top of the foundation with #100 Primer (Protecto-Tak Spray Adhesive may be used in place of #100 Primer) and allow primer to tack up. Do not cover wet primer.
- Peel and stick the **Protecto Premium Dual Guard Threshold Tape™** in place.

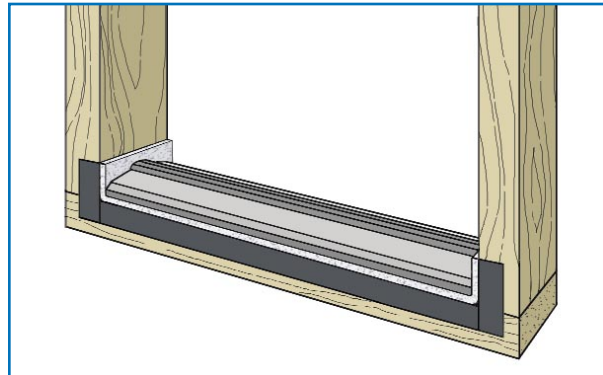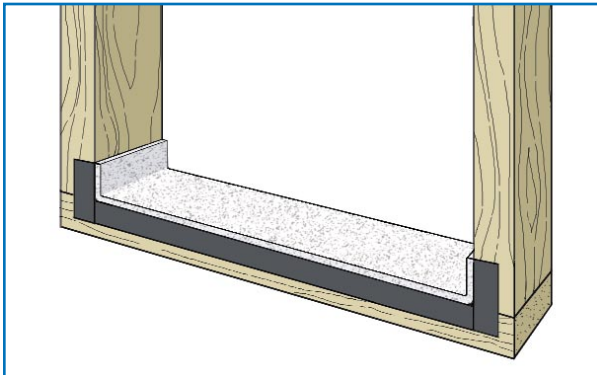

WARNING:

Do not use sealants containing solvent mineral spirits or VOC's on, around or beneath door guard. Do not use in direct contact with flexible (plasticized) polyvinyl chloride (i.e. flexible "J" channel).

AVAILABLE SIZES:

5 1/2" x 6'6" Roll

5 1/2" x 25' Roll

PROTECTO WRAP COMPANY

1955 South Cherokee St. Denver, Colorado 80223 (303) 777-3001 Fax (303) 777-9273 1-800-759-9727
www.protectowrap.com