



DATA SHEET

PRODUCT INFORMATION

Gorilla Guard® EVERFELT™ 30 is a high performance engineered roof underlayment. Designed for virtually any type of roof covering, this innovative, technologically advanced product far outperforms conventional organic felt roofing applications. Atlas Roofing developed this proprietary formula and manufacturing process to create a roof substrate that lays flatter and has greatly increased tear strength compared to traditional products.

GORILLA GUARD® EVERFELT™ 30

Gorilla Guard® EVERFELT™ 30 satisfies shingle underlayment requirements for the Atlas Signature Select® roofing system. In fact, Atlas Gorilla Guard® is the best premium underlayment available for virtually any type of roof covering. When installed properly, it resists tear away from fasteners in strong winds. With Gorilla Guard® EVERFELT™ 30, contractors can exceed standard organic felt requirements and greatly enhance a roof system.

BENEFITS:

- 36% Lighter Than Traditional Organic #30 Felt
- 28% Stronger Substrate Means No More Re-Work Before Applying Shingles
- Four Square Roll Means Half The Handling And Half The Time
- Increased Performance And Durability
- Increased Water Shedding Characteristics
- Lays Flatter Than Traditional Organic Felt

TECHNICAL DATA

	Coverage w/ 2" Lap	Roll Size	Rolls Per Pallet
Gorilla Guard® EVERFELT™ 30	400 sq. ft.	3' x 141.5'	36

CODES & COMPLIANCES

- UL Classified As A Roofing Accessory
- ASTM D6757
- ASTM D226, Type (#15)
- ASTM D4869, Type I, Type II and Type III (#15 & #30 Standard)
- Florida Building Code Approved - FL 11915
- Atlas Signature Select-System Component



GENERAL INSTRUCTIONS

Gorilla Guard® EVERFELT™ 30 shall be applied to a properly prepared dry deck that is smooth, clean and free from any depressions, projections or protruding nails. Roof decks shall be structurally sound and meet or exceed minimum requirements of the deck manufacturer and local codes.

Always lay the Gorilla Guard® EVERFELT™ 30 parallel to the eaves, lapping each course at least 2" over the underlying course. Apply the drip edge underneath the Gorilla Guard® EVERFELT™ 30 along the eaves and over the Gorilla Guard® EVERFELT™ 30 along the rakes. Gorilla Guard® EVERFELT™ 30 should never be applied perpendicular to the eaves. Secure the Gorilla Guard® EVERFELT™ 30 with fasteners every 12" across the lower and upper edge to hold it in place. If more than one piece is required to continue a course, lap the ends at least 4". End laps in succeeding courses should be located at least 6' from end laps in the preceding course. Lap the Gorilla Guard® EVERFELT™ 30 a minimum of 6" from both sides over all hips, ridges and valleys. Where a roof meets a vertical surface, carry the underlayment at least 4" up the vertical surface.


On decks having a slope greater than 4" per foot, one layer of Gorilla Guard® EVERFELT™ 30 should be applied. Some local codes may require specific underlayments.

On slopes 2" to 4" per foot apply a double layer of Gorilla Guard® EVERFELT™ 30 over the entire deck surface. Starting with a 19" wide strip at eaves, overhanging the eaves 1/4" to 3/8", cover with full 36" strips providing a 17" exposure. Continue with 36" strips lapping each course 19" over the preceding course. End laps for low slopes shall be 12" and staggered 6' apart.


The use of Gorilla Guard® EVERFELT™ 30 along with the proper decking materials and shingles will help in meeting Class A and or Class C Fire Ratings. A shingle by itself is not fire-rated, although it is part of the roofing assembly.

**GORILLA GUARD® EVERFELT™ 30
FIELD APPLICATION**

Steep Slope Underlayment Installation

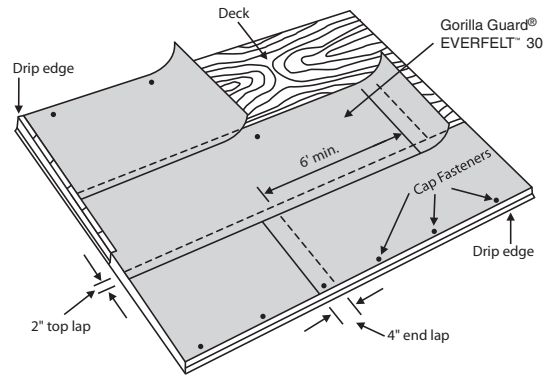

Low Slope Application (Double Coverage)

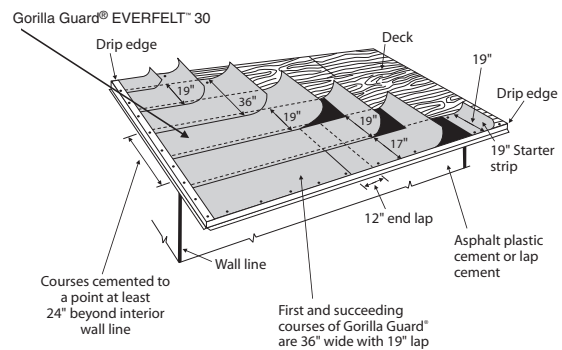

CAUTION

Always learn and observe safe roofing practices according to OSHA and local building code requirements. Always use caution when walking on sloped roof decks and Gorilla Guard® EVERFELT™ 30 underlayments. Do not walk on unsecured Summit or any other loose roofing material lying on sloped roof decks. Dust, dew, water, or debris creates unsafe conditions on the roof. The presence of any foreign matter may drastically change the coefficient of friction (traction) on Gorilla Guard® EVERFELT™ 30 or any other material on a sloped roof deck. Failure to always use proper safety equipment and footwear can result in serious injury or even death.

CORPORATE SALES & MARKETING
2000 RiverEdge Parkway, Suite 800
Atlanta, Georgia 30328

www.AtlasRoofing.com

SALES OFFICES

Ardmore, OK
(800) 261-2852
FAX (580) 223-6894

Daingerfield, TX
(800) 270-2852
FAX (903) 645-2291

Franklin, OH
(800) 260-2852
FAX (937) 746-6040

Hampton, GA
(800) 251-2852
FAX (770) 946-5249

Meridian, MS
(800) 933-2721
FAX (601) 696-2018



Made in U.S.A.



Atlas offers homeowners increased coverage of their Premium Protection Period on any Atlas Signature Select® Roofing System. This product qualifies for use in the Atlas Signature Select® Roofing System when used in combination with other qualifying Atlas products. For more information please visit: www.AtlasRoofing.com/Pro