




Product Guide

Your complete source for attic &
foundation ventilation products



ShingleVent® II




ShingleVent® II-9A and ShingleVent® II-7A

- Approved for Class A roof decks
- 9" and 7" widths for cedar shake or enhanced ridge cap shingles
- 16 sq. in. NFA per linear ft.
- External baffle and weather filter
- 3/12 to 12/12 roof pitch
- Lifetime limited warranty; 5-year Replacement Plus™ protection



ShingleVent® II

- 12" width for most applications
- 18 sq. in. NFA per linear ft.
- External baffle and weather filter
- 3/12 to 16/12 roof pitch
- Miami-Dade County Approved
- Lifetime limited warranty; 5-year Replacement Plus™ protection
- Available with a bag of ring shank nails taped to each 4-foot piece



ShingleVent® II-9

- 9" width for use with cedar shake or enhanced ridge cap shingles
- 16 sq. in. NFA per linear ft.
- External baffle and weather filter
- 3/12 to 12/12 roof pitch
- Miami-Dade County Approved
- Lifetime limited warranty; 5-year Replacement Plus™ protection



ShingleVent® II-7


- 7" width for use with narrow enhanced ridge cap shingles
- 16 sq. in. NFA per linear ft.
- External baffle and weather filter
- 3/12 to 12/12 roof pitch
- Miami-Dade County Approved
- Lifetime limited warranty; 5-year Replacement Plus™ protection

	Color	Model	Length	Pcs/Ctn	Ctns/Pallet	
ShingleVent® II-9A and II-7A						
9" & 7" Filtered Shingle-Over Ridge Vent Class A Fire Rated	Charcoal	CLASH9CC	4'	10	20	
	Charcoal	CLASH7CC				
ShingleVent® II						
12" Filtered Shingle-Over Ridge Vent	Black	SHFVBL	4'	10	15	
	Brown	SHFVBR	4'	10	15	
	Charcoal	SHFVCC	4'	10	15	
	Gray	SHFVGR	4'	10	15	
ShingleVent® II with Nails						
12" Filtered Shingle-Over Ridge Vent with a Bag of Nails	Black	SHFVBLN	4'	10	15	
ShingleVent® II-9						
9" Filtered Shingle-Over Ridge Vent	Charcoal	SHFV9CC	4'	10	20	
ShingleVent® II-7						
7" Filtered Shingle-Over Ridge Vent	Charcoal	SHFV7CC	4'	10	20	

BLACK BROWN CHARCOAL GRAY



ShingleVent® II FEATURES

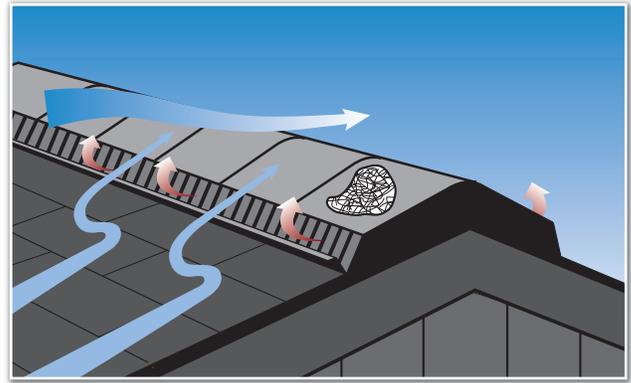

- The external wind baffle directs airflow up and over the vent, creating an area of low pressure over the vent openings, pulling air out of the attic — even when the wind is not 100% perpendicular to the vent.

The external wind baffle is the first line of defense to deflect rain and snow over the vent, protecting the roof and attic from weather infiltration.

An internal weather filter is an additional layer to help trap snow before it can enter the attic, and protects against dust and insect intrusion.

Preprinted slot guides for proper slot width and alignment.


Internal ribs add strength and stability without compromising flexibility.

Built-in ventilating end plug features a self-closing, weather-tight, hinged design.

Hinged ventilating end plug design flexes for different roof pitches without affecting the rounded radius of the vent so cap shingles lay flat over the vent to help prevent cap shingles from cracking.

Made of durable, copolymer resins so the vent remains sturdy, nailable and flexible in all climates.

Cap shingles install easily, making the vent virtually invisible.

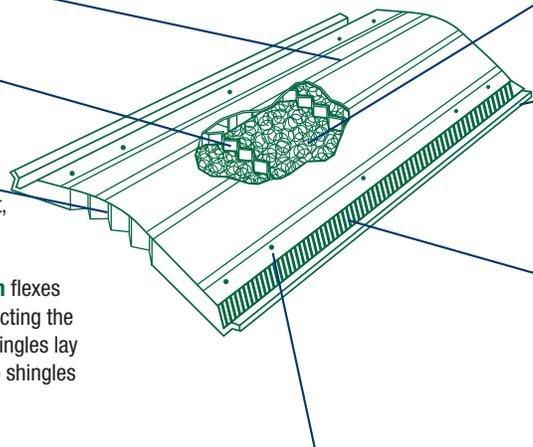

Weather filter provides advanced protection from rain, snow, dust and insect intrusion.

External wind baffle deflects wind and weather over the vent. Creates low pressure above the vent to pull air out of the attic even when the wind is not 100% perpendicular to the vent.

Air slots have 18 square inches of Net Free Area per linear foot.

Designed with reinforced nail bosses to help prevent over nailing.

Pre-formed to a 4/12 pitch so the vent can easily flex from 3/12 to 16/12 roof pitches.


Nail holes at 16" and 24" center make it easy to locate and nail through studs.

Fact: after **10 years** of accelerated wind-blown dust exposure, Air Vent's ShingleVent II ridge vent collected **3.3 grams of dust** for a 2-foot section. It was the lowest amount of any of the ridge vents tested. Furthermore, the dust collected only resulted in a **5% reduction in airflow performance**. That's 10% at the 20-year mark, 15% at 30 years. It's more realistic; however, that the entire roof will be replaced by the time 30 years comes around.



VenturiVent™ Plus

Hip Ridge® vent SHINGLE-OVER HIP VENT

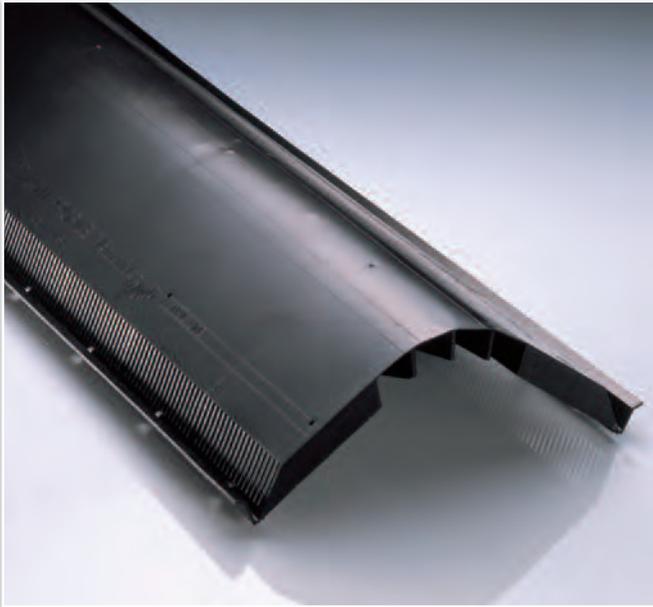

Hip Ridge Vent Installation

Note: For best appearance, install inactive vents the entire length of the hip.

VenturiVent™ Plus

- External baffle shingle-over
- Built-in ventilating end plug
- 18 sq. in. NFA per linear ft.
- Individual cartons can ship UPS
- 3/12 to 16/12 roof pitch
- Lifetime limited warranty; 5-year Replacement Plus™ protection
- Available with a bag of ring shank nails taped to each 4-foot piece

Hip Ridge® Vent

- Exhaust vent for diagonal hips
- 12 sq. in. NFA per linear foot
- Integrated gaskets for defense against water infiltration
- External wind baffle and internal weather filter
- Hip Ridge pitch 3/12 or greater
- Uni-directional construction
- Lifetime limited warranty; 5-year Replacement Plus™ protection

	Color	Model	Part No.	Length	Pcs/Ctn	Ctns/Pallet	
VenturiVent™ Plus 12" Shingle-Over Ridge Vent	Black	VVP	84718	4'	10	15	  
VenturiVent™ Plus with Nails 12" Shingle-Over Ridge Vent with a Bag of Nails	Black	VVPN	84719	4'	10	15	  
Hip Ridge® Vent 12" Filtered Shingle-Over Hip Vent	Black	HIPVBL	84742	4'	10	15	 




Peak Performer™ I

- Unfiltered rolled ridge vent
- External baffle shingle-over
- Nail gun friendly with two coils of nails; built-in ventilating end plug
- 12 sq. in. NFA per linear ft.
- 3/12 to 12/12 roof pitch
- Lifetime limited warranty; 5-year Replacement Plus™ protection

Peak Performer™ II

- Filtered rolled ridge vent
- External baffle shingle-over
- Nail gun friendly with two coils of nails; built-in ventilating end plug
- 12 sq. in. NFA per linear ft.
- 3/12 to 12/12 roof pitch
- Lifetime limited warranty; 5-year Replacement Plus™ protection

VenturiVent™ Roll

- Unfiltered rolled ridge vent
- External baffle shingle-over
- Nail gun friendly; built-in ventilating end plug
- 12 sq. in. NFA per linear ft.
- 3/12 to 12/12 roof pitch
- Lifetime limited warranty; 5-year Replacement Plus™ protection

RidgeVent 20

- Environmentally friendly; made from organic fibers
- Coil nails included
- 17 sq. in. NFA per linear ft.
- 10 1/2" Wide

	Color	Model	Part No.	Length	Pcs/Ctn	Ctns/Pallet	
Peak Performer™ I Unfiltered Shingle-Over Rolled Ridge Vent with Nails	Black	PPI	84731	28'	1	25	
Peak Performer™ II Filtered Shingle-Over Rolled Ridge Vent with Nails	Black	PPII	84732	28'	1	25	
VenturiVent™ Roll Unfiltered Shingle-Over Rolled Ridge Vent	Black	VVR20	84735	20'	1	12	
RidgeVent 20 Rolled Ridge Vent	Black	MRV20	84743	20'	1	24	

	Color	Model	Part No.	Pcs/Ctn	Net Free Area (square inches)
--	-------	-------	----------	---------	-------------------------------

Wall-Mount Vents - Aluminum

Rectangular Wall Louvers	Mill	8x8MF	RL808000	6	17.6/pc.
	White	8x8WH	RL808900	6	17.6/pc.
	White	8x12WH	RL812090	6	26.4/pc.
	Mill	12x12MF	81104	6	39.6/pc.
	White	12x12WH	81202	6	39.6/pc.
	Mill	12x18MF	81112	6	59.4/pc.
	White	12x18WH	81214	6	59.4/pc.
	Mill	14x24MF	81134	6	92.4/pc.
	White	14x24WH	81232	6	92.4/pc.
	Mill	18x24MF	81139	2	118.8/pc.
White	18x24WH	81237	2	118.8/pc.	


Wall-Mount Vents

- Aluminum construction
- Flush flange
- No screens





Multi-Pitch FilterVent®

- External baffle and internal weather filter
- Stucco embossed aluminum
- 18 sq. in. NFA per linear ft.
- 3/12 to 12/12 roof pitch
- 30-year limited warranty; 5-year Replacement Plus™ protection



Multi-Pitch FilterVent® - Venting Packs

- Vent Packs contain four 8' pieces, two end plugs and three connector plugs and straps
- Can be shipped UPS
- 3/12 to 12/12 roof pitch
- 30-year limited warranty; 5-year Replacement Plus™ protection

Multi-Pitch FilterVent® Accessories

- Assure tight, secure joints
- Stucco embossed aluminum strap
- Flexible PVC plugs
- Can be shipped UPS
- 24 cartons per master carton
- For use with Multi-Pitch or Continuous Unfiltered Ridge Vents

	Color	Model	Pcs/Ctn
Multi-Pitch FilterVent® - 8 Foot			
8' Filtered Ridge Vent	Mill	FV110MF	12
	Black	FV110BL	12
	Brown	FV110BR	12
	Bronze	FV110BRZ	12
	Gray	FV110GR	12
	White	FV110WH	12

	Color	Model	Pcs/Ctn
Multi-Pitch FilterVent® - 10 Foot			
10' Filtered Ridge Vent	Mill	FV101MF	12
	Black	FV101BL	12
	Brown	FV101BR	12
	Bronze	FV101BRZ	12
	Gray	FV101GR	12
	White	FV101WH	12

	Color	Model	Part No.	Pcs/Ctn
--	-------	-------	----------	---------

Multi-Pitch FilterVent® - Venting Packs

Venting Packs	Mill	FV111MF	4 + accessories
	Black	FV111BL	4 + accessories
	Brown	FV111BR	4 + accessories
	Bronze	FV111BRZ	4 + accessories
	Gray	FV111GR	4 + accessories
	White	FV111WH	4 + accessories

Multi-Pitch FilterVent® Accessories

End Plug	Black	FV104	84420	12
Connector Plug and Strap	Mill	FVC105MF	84407	18
	Brown	FVC105BR	84411	18
	Black	FVC105BL	84409	18
	White	FVC105WH	84412	18
	Bronze	FVC105BRZ	84410	18
	Light Gray	FVC105GR	84408	18
Connector Strap	Mill	PPS	84390	100
	Brown	PPS	84391	100
	Black	PPS	84392	100
	White	PPS	84393	100
	Bronze	PPS	84394	100
	Light Gray	PPS	84395	100




Peak FilterVent®

- Use for contemporary roofs formed by a pitched roof and a vertical wall that drops off from the pitched roof
- 9 sq. in. NFA per linear ft.
- Can be shipped UPS
- 3/12 to 12/12 roof pitch


Flash FilterVent®

- Use at wall/roof junction
- 9 sq. in. NFA per linear ft.
- Can be shipped UPS
- 3/12 to 12/12 roof pitch


Utility FilterVent®

- For extra wide ridge beams and custom applications
- 9 sq. in. NFA per linear ft.
- Can be shipped UPS
- 3/12 to 16/12 roof pitch


Continuous Unfiltered Ridge Vent

- Embossed aluminum
- 18 sq. in. NFA per linear ft.

	Color	Model	Part No.	Length	Pcs/Ctn
--	-------	-------	----------	--------	---------

Peak FilterVent® - Venting Packs

Four 8' pieces, two end plugs and three connector plugs and straps

Black	PFV152BL	8'	4 + accessories
Brown	PFV152BR	8'	4 + accessories
Bronze	PFV152BRZ	8'	4 + accessories
Gray	PFV152GR	8'	4 + accessories

Flash FilterVent® - Venting Packs

Four 8' pieces, four pieces of supplemental flashing, two end plugs and three connector plugs and straps

Black	FFV162BL	8'	4 + accessories
Brown	FFV162BR	8'	4 + accessories
Bronze	FFV162BRZ	8'	4 + accessories
Gray	FFV162GR	8'	4 + accessories

Utility FilterVent® - Venting Packs

Four 8' pieces, two end plugs and three gray connector plugs and straps

Black	UFV172BL	8'	4 + accessories
Brown	UFV172BR	8'	4 + accessories
Bronze	UFV172BRZ	8'	4 + accessories
Gray	UFV172GR	8'	4 + accessories

Continuous Unfiltered Ridge Vent

10' Aluminum Ridge Vent

Mill	CRV100MF	84401	10'	12
Brown	CRV100BR	84405	10'	12
Black	CRV100BL	84403	10'	12
White	CRV100WH	84399	10'	12
Bronze	CRV100BRZ	84406	10'	12
Light Gray	CRV100GR	84402	10'	12




RVG 55 Slant Galvanized

- Heavy-duty galvanized construction
- NFA (square inches): 50/pc.
- 8" round opening
- Optional filter available (also available in White)


RVG 53 Square High Collar

- Square, galvanized steel
- NFA (square inches): 50/pc.
- 8" round opening


B-144 Metal Dome

- Galvanized steel
- 24" x 24" flashing
- NFA (square inches): 144/pc.
- 14" round opening

	Color	Model	Part No.	Pcs/Ctn	Ctns/Pallet
--	-------	-------	----------	---------	-------------

Airhawk® RVG 55 Slant Galvanized

Slant Galvanized	Mill	RVG55ML	RVG55000	6	12
	Black	RVG55BL	RVG55010	6	12
	Brown	RVG55BR	RVG55080	6	12
	W/wood	RVG55WW	RVG550G0	6	12

Airhawk® RVG 51 Square Galvanized

Square Galvanized	Mill	RVG51ML	RVG51000	9	15
	Black	RVG51BL	RVG51010	9	15
	Brown	RVG51BR	RVG51080	9	15
	W/wood	RVG51WW	RVG510G0	9	15


Airhawk® RVG 53 Square High Collar

High Collar Square Galvanized	Mill	RVG53HCO	RVG53HC000	6	12
-------------------------------	------	----------	------------	---	----

Airhawk® RVG 51 Square Big Base

Big Base Square Galvanized	Mill	RVG51BBO	RVG51BB000	10	12
----------------------------	------	----------	------------	----	----

Airhawk® RVG 40 Slant Galvanized

Slant Galvanized	Mill	RVG40ML	RVG40000	9	24
	Black	RVG40BL	RVG40010	9	24
	Brown	RVG40BR	RVG40080	9	24
	W/wood	RVG40WW	RVG400G0	9	24

Airhawk® RVG 50 Slant Galvanized

Slant Galvanized	Mill	RVGL50ML	RVGL5000	10	16
	Black	RVGL50BL	RVGL5010	10	16
	Brown	RVGL50BR	RVGL5080	10	16
	W/wood	RVGL50WW	RVGL50G0	10	16

Airhawk® B-144 Metal Dome

Galvanized Steel Dome	Mill	B144MF	97690	1	30
	Black	B144BK	97692	1	30
	Brown	B144BR	97693	1	30
	W/wood	B144WW	97691	1	30

MILL BLACK BROWN W/WOOD





SLA Slant Aluminum

- 1-piece base and throat is weather tight and adds strength
- Large flange for easy installation
- NFA (square inches): 50/pc.
- 8" round opening
- Miami-Dade County Approved
- Optional filter available

RVA 51 / RVG 51 Square Vent

- Aluminum or galvanized
- Heavy, rust-free integral screen
- NFA (square inches): 50/pc.
- 8" round opening

RVA 40 / RVG 40 Slant Back

- Aluminum or galvanized
- Low profile, compact vent
- NFA (square inches): 40/pc.
- 7 1/2" round opening

RVA 50 / RVG 50 Slant Back

- Aluminum or galvanized
- NFA (square inches): 50/pc.
- 8" round opening
- Optional filter available

	Color	Model	Part No.	Pcs/Ctn	Ctns/Pallet	
--	-------	-------	----------	---------	-------------	--

Airhawk® SLA Slant Aluminum

Slant Aluminum	Gray	SLAGR	85281	6	12
	Black	SLABL	85282	6	12
	Brown	SLABR	85283	6	12
	W/wood	SLAWW	85284	6	12
	White	SLAWH	85285	6	12



Airhawk® RVA 51 Square Vent

Square Aluminum	Mill	RVA51ML	RVA510000	12	15
	Black	RVA51BL	RVA510100	12	15
	Brown	RVA51BR	RVA510800	12	15
	W/wood	RVA51WW	RVA510G00	12	15
	White	RVA51WH	RVA510900	12	15





Airhawk® RVA 40 Slant Back

Slant Aluminum	Mill	RVA40ML	RVA40000	12	20
	Black	RVA40BL	RVA40010	12	20
	Brown	RVA40BR	RVA40080	12	20
	W/wood	RVA40WW	RVA400G0	12	20

Airhawk® RVAL Slant Back

RVAL Slant Aluminum	Mill	RVA50ML	RVAL5000	10	16
	Black	RVA50BL	RVAL5010	10	16
	Brown	RVA50BR	RVAL5080	10	16
	White	RVA50WH	RVAL5090	10	16
	W/wood	RVA50WW	RVAL50G0	10	16





SLP61 Slant Back Plastic

- 16.5" x 19.5" flashing
- NFA (square inches): 61/pc.
- 9" square opening

SLP150 Slant Back Plastic

- 24" x 24" flashing
- NFA (square inches): 150/pc.
- 13" square opening
- Integral molded screen

SQP Square Plastic

- 17" x 18" flashing
- NFA (square inches): 61/pc.
- Rain diverter throat
- 9" square opening

B-144 Plastic Dome

- Round plastic
- 24" x 24" flashing
- NFA (square inches): 144/pc.
- 14" round opening

	Color	Model	Part No.	Pcs/Ctn	Ctns/Pallet	
--	-------	-------	----------	---------	-------------	--

Airhawk® SLP61 Slant Back Plastic

Slant Back Plastic

Black	SLP61BL	90121	6	24
Brown	SLP61BR	90122	6	24
Gray	SLP61GR	90123	6	24
W/wood	SLP61WW	90125	6	24



Airhawk® SLP150 Slant Back Plastic

Slant Back Plastic

Black	SLP150BL	90141	2	21
Brown	SLP150BR	90142	2	21
Gray	SLP150GR	90143	2	21
W/wood	SLP150WW	90145	2	21



Airhawk® SQP Square Plastic

Square Plastic

Black	SQP61BL	90111	6	27
Brown	SQP61BR	90112	6	27
Gray	SQP61GR	90113	6	27
W/wood	SQP61WW	90115	6	27

Airhawk® B-144 Plastic Dome

Plastic Dome

Gray	B144GR	97695	1	30
------	--------	-------	---	----





12" & 14" Internal Brace

- Miami-Dade County Approved
- NFA (square inches): 95/pc (12"); 132/pc (14")
- Easy Installation



12" & 14" External Brace

- Miami-Dade County Approved
- NFA (square inches): 95/pc (12"); 132/pc (14")
- Easy Installation



Bath or Dryer Vent

- Installs easily as a roof cap or as a side vent
- 4" diameter stem
- 3 7/8" stem length
- Dampened for one-way venting
- Screen protects against debris; removable for dryer venting
- 3/12 to 12/12 roof pitch

Turbine Product Features

- Maintenance-free dual bearing system
- Adjustable base
- Heavy-duty polypropylene bracing system
- Lifetime limited warranty

	Color	Model	Part No.	Pcs/Ctn	Ctns/Pallet	
--	-------	-------	----------	---------	-------------	--

Airhawk® Aluminum Wind Turbines

12" Internal Brace	Mill	TIB12SML	TIBS0000	1	30	
	Black	TIB12SBL	TIBS0100	1	30	
	Brown	TIB12SBR	TIBS0800	1	30	
	W/wood	TIB12SWW	TIBS0G00	1	30	
12" External Brace	Mill	TOB12SML	TOBS0000	1	24	
	Black	TOB12SBL	TOBS0100	1	24	
	Brown	TOB12SBR	TOBS0800	1	24	
	W/wood	TOB12SWW	TOBS0G00	1	24	
14" Internal Brace	Mill	TIB14SML	TIBS1400	1	24	
	Black	TIB14SBL	TIBS1401	1	24	
	Brown	TIB14SBR	TIBS1408	1	24	
	W/wood	TIB14SWW	TIBS140G	1	24	
14" External Brace	Mill	TOB14SML	TOBS1400	1	24	
	Black	TOB14SBL	TOBS1401	1	24	
	Brown	TOB14SBR	TOBS1408	1	24	
	W/wood	TOB14SWW	TOBS140G	1	24	

Bath or Dryer Vent

4" Diameter Durable Plastic	Black	BDVENT	59427	4	216
------------------------------------	-------	--------	-------	---	-----





30-Watt Solar Attic Fan Includes Solar Controller™

- Ventilates up to 2,800 square feet
- Fade, rust and dent resistant heavy-duty plastic dome
- Solar panel is wind, hail and impact resistant
- Solar panel tilts and rotates for maximum sun exposure and collects energy
- Remote-mountable solar panel – includes 15 feet of cable wire
- Patent pending *Smooth Air Deflector*® interior cone design for 30% better airflow
- Complies with Florida Building Codes
- Evaluated by Texas Department of Insurance (TDI)
- Curb Mount Adapter available for flat roofs – sold separately
- Lifetime Limited warranty includes 5-year Replacement Plus™ protection
- Requires 940 square inches of intake vents



15-Watt Solar Attic Fan Includes Solar Controller™

- Ventilates up to 1,900 square feet
- Fade, rust and dent resistant heavy-duty plastic dome
- Solar panel tilts and rotates for maximum sun exposure and collects energy
- Solar panel is wind, hail and impact resistant
- Patent pending *Smooth Air Deflector*® interior cone design for 30% better airflow
- Complies with Florida Building Codes
- Evaluated by Texas Department of Insurance (TDI)
- 10-year limited warranty includes 5-year Replacement Plus™ protection
- Requires 638 square inches of intake vents



Solar Controller™ Humidistat/Thermostat

- Intelligently manages operation of Solar Attic Fans
- **Electronic thermostat** – enable or disable. Turns fan on, power source permitting, at 80° F and off at 77° F.
 - **Electronic humidistat** – turns fan on, power source permitting, at 75% relative humidity and off at 65% relative humidity.
 - AC Power adaptor for operation after dark or when solar power not available:
 - Runs on intermittent 15-minute cycles for up to 10 hrs. or until solar power becomes available.
 - Hand-held remote displays attic temperature, attic humidity, fan operating status and fan power source.
 - 1-year limited warranty



	Color	Model	Part No.	Pcs/Ctn	Ctns/Pallet	
Solar Powered Attic Ventilators 30-Watt Solar Roof-Mount With Solar Controller Humidistat/Thermostat	Black	AV9930TRS	97326	1	18	
 15-Watt Solar Roof-Mount With Solar Controller Humidistat/Thermostat	Black	AV9915TRS	97325	1	18	



SOLARCOOL[®] Ventilator

- Solar powered attic ventilator
- Ventilates up to 1,200 square feet under direct sunlight
- Solar panel tilts and rotates for maximum sun exposure and energy collection
- No electrical hook-up needed
- Solar panel is wind, hail and impact resistant
- 5-year limited warranty; 2-year Replacement Plus™ protection



NPSP8WW Solar Vent

- Solar powered attic ventilator
- Solar panel mounts separately
- Ventilates up to 1,200 square feet under direct sunlight
- No electrical hook-up needed
- Solar panel is wind, hail and impact resistant
- 5-year limited warranty; 2-year Replacement Plus™ protection



Power Cool Plus™

- Pre-wired Humidistat/Thermostat
- UL listed with thermal overload protection
- Lifetime limited warranty; 5-year Replacement Plus™ protection (Model PC15)
- 10-year limited warranty; 5-year Replacement Plus™ protection (Model PC12)



Power Cool™

- Thermostat only
- UL listed with thermal overload protection
- 10-year limited warranty; 5-year Replacement Plus™ protection (Model BR28)
- 5-year limited warranty; 2-year Replacement Plus™ protection (Model BR26)

Product Features:

All roof-mount power vents have a galvanized steel dome, a plastic screen that won't rust or rattle and a 24" x 24" flange.

	Color	Model	Part No.	Pcs/Ctn	Ctns/Pallet	
Solar Ventilators						
SOLARCOOL[®] Roof-Mount Metal	Black	SC8BL	97310	1	24	
Roof-Mount Metal w/separate solar panel	W/wood	NPSP8WW	53510	1	24	

Power Cool Plus™ Power Attic Ventilators

Roof-Mount Metal with pre-wired Humidistat/Thermostat 1500 CFM	Gray	PC15GR	97701	1	30	
	W/wood	PC15WW	97702	1	30	
	Brown	PC15BR	97703	1	30	
	Black	PC15BK	97704	1	30	
Roof-Mount Metal with pre-wired Humidistat/Thermostat 1170 CFM	Gray	PC12GR	97711	1	30	
	W/wood	PC12WW	97712	1	30	
	Brown	PC12BR	97713	1	30	
	Black	PC12BK	97714	1	30	

Power Cool™ Power Attic Ventilators

Roof-Mount Metal with Thermostat 1320 CFM	Gray	BR28GR	97677	1	30	
	W/wood	BR28WW	97679	1	30	
Roof-Mount Metal with Thermostat 1170 CFM	Gray	BR26GRMT	97669	1	30	
	Brown	BR26BRMT	97671	1	30	
	Black	BR26BKMT	97672	1	30	
	W/wood	BR26WWMT	97676	1	30	
Roof-Mount Plastic with Thermostat 1170 CFM	Gray	BR26GR	97673	1	30	
	Brown	BR26BR	97675	1	30	
	Black	BR26BK	97674	1	30	





Gable Attic Fans

- With Humidistat/Thermostat or Thermostat only
- Lifetime limited warranty; 5-year Replacement Plus™ protection (Model APGH)
- 10-year warranty; 5-year Replacement Plus™ protection (Model WCGB)

Solar Power Gable Fan

- Solar panel
- Ventilates up to 1,200 square feet under direct sunlight
- No electrical hook-up needed
- Solar panel is wind, hail and impact resistant
- 5-year limited warranty; 2-year Replacement Plus™ protection

Whole-House Fans

Belt-Drive

- Belt-drive pulley allows quieter operation
- 2-speed wall switch
- 10-year limited warranty; 5-year Replacement Plus™ protection

Direct-Drive

- Pull-chain operation
- 2 speeds
- 10-year limited warranty; 5-year Replacement Plus™ protection

Gable Fan Product Features

- UL listed with thermal overload protection
- Fan blade is encased in a patented, innovative series of rings
- 30% quieter and 35% more efficient than comparable units
- Shutter sold separately



Whole-House Fan Product Features

- Shipped in assembled wood frame
- UL listed with thermal overload protection
- Automatic shutter included

Optional Belt-Drive Wireless Switch Kit (sold separately)

Contains:

- Remote or mountable single on/off switch
- Double wall mount on/off switch with 1+hour timer switch (up to 12 hrs)
- 2-channel relay receiver – mounts to fan



	Model	Part No.	Pcs/Ctn	Ctns/Pallet	
Gable-Mount Power Attic Ventilators					
Gable-Mount with Humidistat/Thermostat 1620 CFM	APGH	53320	1	64	
Gable-Mount with Thermostat only 1320 CFM (Not shown)	WCGB	53319	1	64	
Solar Power Gable-Mounts	NPSG8	53560	1	60	
Automatic Gable Shutter (white only)	SHT15W	54703	1	160	
Whole-House Fans					
36" Belt-Drive/Shutter	WH362BDX	54508	1	8	
30" Belt-Drive/Shutter	WH302BDX	54506	1	8	
30" Direct-Drive/Shutter	WH302MLX	54304	1	10	
24" Direct-Drive/Shutter	WH242MLX	54301	1	10	
Belt-Drive Wireless Switch Kit		58080	1		





RADIANT
SKYLIGHT TUBE



SPECTRUM
SKYLIGHT TUBE


AV1914ST - 14" Low-Profile Skylight Tube

- 14-inch round low-profile roof lens
- Acrylic dome with 98% light transmission
- Perfect for residential use
- Compact flashing for more versatile installation options
- Pre-attached, 6-foot flexible tube for simplified installation
- Provides natural sunlight in dark hallways, closet, kitchens, bathrooms and laundry rooms
- Reduces energy usage
- Great substitute for existing recessed light fixtures

**AV2114ST - 14" Low-Profile Skylight Tube
with Ventilating Option**

- 14-inch square low-profile roof lens
- Acrylic dome with 98% light transmission
- Patented passive ventilation capability
 - Vent tabs allow heat & moisture to escape and prevents rain/snow infiltration
- Dual ceiling lens for improved energy efficiency – simulated U-Factor of 0.36 U.S./I-P
- Perfect for residential and commercial use
- Compact flashing for more versatile installation options
- Includes 8 feet of flexible tube for simplified installation
- Provides natural sunlight in dark hallways, corners, closets, kitchens, bathrooms and laundry rooms
- Reduces energy usage
- Great substitute for existing recessed light fixtures
- Curb Mount Adapter available for flat roofs – sold separately

Ventilating Options

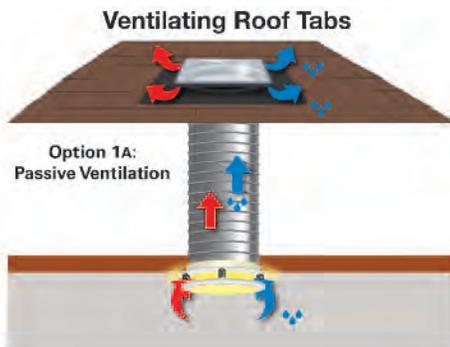

Option 1A:
Passive Ventilation

Ceiling Vent Open

- Install ventilating roof tabs in roof dome
- Install magnets in ceiling lens
- Passively ventilate excess heat/moisture through space in ceiling lens, up tube and out roof dome
- Easily convert to Option 1B



Option 1B:
Disabled Ventilation

Ceiling Vent Closed

- Install ventilating roof tabs in roof dome
- Keeps the cold out and the heat in
- Remove magnets in ceiling lens from Option 1A
- Perfect solution for seasonal changes



Option 2:
No Ventilation

Ceiling Vent Closed

- Install non-ventilating roof tabs
- Keep the cold out and the heat in
- No passive ventilation with this configurations

	Model	Part No.	Pcs/Ctn	Ctns/Pallet	
--	-------	----------	---------	-------------	--

Radiant Skylight Tube

Black

98100

1

30

Spectrum Skylight Tube

Black

98101

1



18



THE FACTS

#1 Ice Dams – The Edge™ Vent Passes 30-Day Ice Dam Test

At no time during the testing did The Edge Vent allow for or contribute to weather infiltration into the slot or the attic.

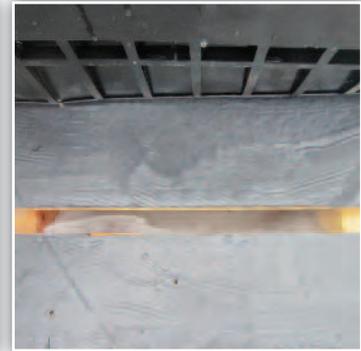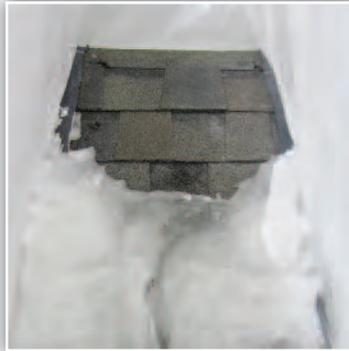


During 30 days of freezing/thaw cycles, The Edge Vent was intentionally covered under an ice dam.

The deck under The Edge Vent and the attic itself remained dry throughout the 30-day ice dam test.

Notes:

- 1.) In warm climates, 15 or 30 pound roofing felt may be substituted for the adhesive-backed waterproof shingle underlayment
- 2.) Adhesive-backed waterproof shingle underlayment or roofing felt (climate specific per note 1) must be installed under AND over the vent

Proper installation for all climates using appropriate underlayment under AND over The Edge Vent.

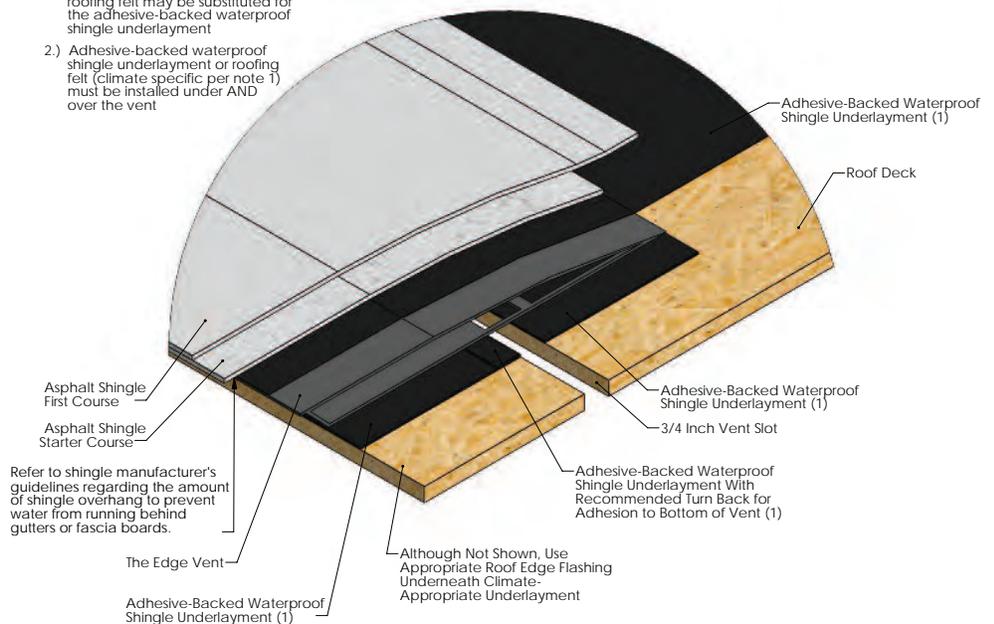

#2 Gutter Protection Devices

COMPATIBLE

If the gutter protection device is a flat panel that attaches exclusively to the gutter itself (front and/or back) or the fascia and does not require any mounting onto the roof deck, under the shingles, under or over the top of The Edge Vent, it is compatible with The Edge Vent.




NOT COMPATIBLE

If the gutter protection device requires any mounting onto the roof deck, under the shingles, under or over the top of The Edge Vent – even if the device has airflow openings itself – it is not compatible with The Edge Vent and, thus, the two products cannot coexist.

#3 Installing The Edge Vent Up The Roof

Air Vent only recommends moving The Edge Vent up the roof in an open soffit (exposed rafter tail) situation. Such attics do not begin at the roof's edge and, thus, the vent would be useless at that location. Moving The Edge Vent up the roof is acceptable in open soffit situations. However, if the attic begins at the edge of the roof that is the intended location of The Edge Vent so incoming air can enter at the lowest possible point under the roof deck, which is the goal of a proper attic ventilation system.



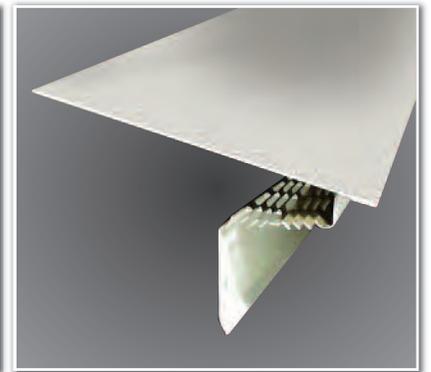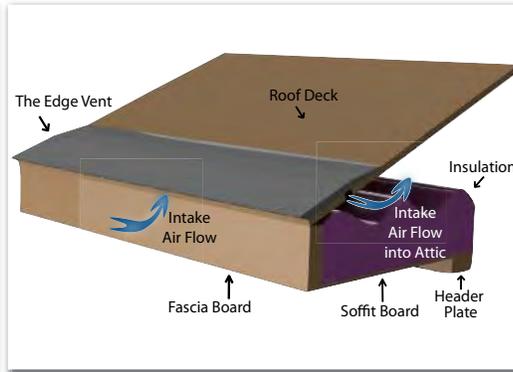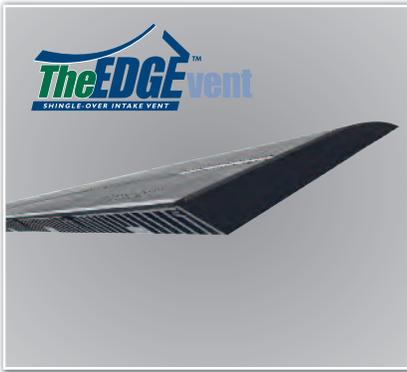

The Edge™ Vent

- Shingle-over, roof-top intake
- Designed for homes with or without overhangs
- 9 sq. in. NFA per linear ft.
- Minimum 3/12 roof pitch
- Lifetime limited warranty; 5-year Replacement Plus™ protection
- Passed 30-day ice dam testing


The Edge™ Vent simulation of air flowing through the vent and into the attic space

Pro Flow™ Vented Drip Edge

- Designed for homes without overhangs
- Aluminum
- 9 sq. in. NFA per linear ft.
- Shipped motor freight only

	Color	Model	Part No.	Length	Pcs/Ctn	
Shingle-Over Intake Vent						
The Edge™ Vent	Black	EVI	83000	4'	10	
Pro Flow™ Vented Drip Edge						
10' Drip Edge Vent	Mill	VDEMF	95022	10'	10	
	Brown	VDEBR	95021	10'	10	
	Black	VDEBL	95020	10'	10	
	White	VDEWH	95023	10'	10	
Foam End Plugs	Gray	DEV122	84800		12	



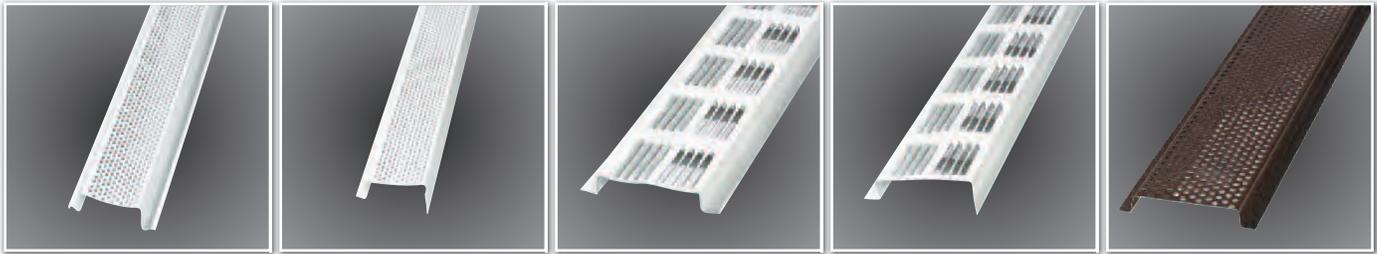

Perforated PVC Retrofit

- Retrofit design for standard rafter or manufactured truss construction
- 9 sq. in. NFA per linear ft.

Perforated PVC New Construction

- Designed for standard rafter or manufactured truss new construction
- 9 sq. in. NFA per linear ft.

Louvered Aluminum Retrofit

- Retrofit design for standard rafter or manufactured truss construction
- 9 sq. in. NFA per linear ft.

Louvered Aluminum New Construction

- Designed for standard rafter or manufactured truss new construction
- 9 sq. in. NFA per linear ft.

Perforated Aluminum

- Designed for standard rafter or manufactured truss construction
- 8 sq. in. NFA per linear ft.

	Color	Model	Part No.	Length	Pcs/Ctn
--	-------	-------	----------	--------	---------

Continuous Soffit Vent

Perforated PVC
Retrofit - double leg return

White	SV351WH	90320	8'	50
Brown	SV351BR	90325	8'	50

Perforated PVC
New Construction - single leg return

White	SV352WH	90254	8'	50
-------	---------	-------	----	----

Louvered Aluminum
Retrofit - double leg return

Mill	SV201MF	84300	8'	50
White	SV201WH	84302	8'	50
Brown	SV201BR	84304	8'	50

Louvered Aluminum
New Construction - single leg return

Mill	SV202MF	84306	8'	50
White	SV202WH	84307	8'	50
Brown	SV202BR	84308	8'	50

Perforated Aluminum
Retrofit - double leg return

Mill	SP8ML	SP800000	8'	50
White	SP8WH	SP800900	8'	50
Brown	SP8BR	SP800800	8'	50

Note: These products can be shipped UPS.




Undereave Vents

- Heavy-duty aluminum or galvanized
- 8 mesh aluminum screen
- Can be shipped UPS
- NFA (square inches):
 16" x 4" = 28/pc.
 16" x 6" = 42/pc.
 16" x 8" = 56/pc.


Mini Louvers

- Tooled aluminum; die-stamped grill
- NFA (square inches):
 1" = .18/pc. 2" = .47/pc.
 3" = 1.34/pc. 4" = 2.88/pc.
- No screening
- 6 pieces per bag; six bags per carton
- Can be shipped UPS


Oval Undereave Vents

- NFA: 22 square inches
- Integral molded grill
- 36 pieces per carton
- Plastic construction

	Color	Model	Part No.	Pcs/Ctn	Ctns/Pallet
--	-------	-------	----------	---------	-------------

Undereave Vents

16" x 4" / 24-pack	Mill	EV16424MF	84126	24	108
	White	EV16424WH	84226	24	108
	Brown	EV16424BR	84228	24	108
16" x 6" / 24-pack	Mill	EV16624MF	84115	24	84
	White	EV16624WH	84215	24	84
	Brown	EV16624BR	84217	24	84
16" x 8" / 24-pack	Mill	EV16824MF	84210	24	72
	White	EV16824WH	84211	24	72
	Brown	EV16824BR	84212	24	72
16" x 4" / 24-pack	Galv.	618R	84229	24	200
16" x 6" / 24-pack	Galv.	618R	84219	24	136
16" x 8" / 24-pack	Galv.	EV16824GA	84213	24	72

	Color	Model	Part No.	Pcs/Ctn	
--	-------	-------	----------	---------	--

Mini Louvers

1"	Mill	MLM1MF	50000	36
2"	Mill	MLM2MF	50001	36
3"	Mill	MLM3MF	50002	36
4"	Mill	MLM4MF	50003	36
1"	White	MLM5WH	50004	36
2"	White	MLM6WH	50005	36
3"	White	MLM7WH	50006	36
4"	White	MLM8WH	50007	36

Oval Undereave Vents

Brown	OEV436BR	OEV436BR	36
White	OEV436WH	OEV436WH	36

MILL WHITE BROWN





NEW

Low Voltage Powered Foundation Vents

- 8" x 16" to fit into a standard block opening
- Completely screened, front & back
- No mortar required for installation
- Totally enclosed, thermally protected motor
- Low voltage unit
- Series 5 & 6 Requires controls kit (sold separately)
- Radon Unit requires Power Supply Unit only (sold separately)



Low Voltage Radon Powered Foundation Vents



NEW

Controls Kit

- Damp Weather Shutoff – dual control adjusts temperature & humidity at intake vent
 - Humidistat – turns unit on to mitigate humidity
 - Power Supply Unit – 24 VAC output, operates up to 3 power vents
 - Control Cables – 25' attaches all control kit units together
 - No electrician required
- KIT REQUIRED ON ALL SERIES 5 AND 6 LOW VOLTAGE FOUNDATION VENTS (NEEDS ACCESSABLE GFCI OUTLET)**



Flex Duct and Adapter

- 25' section with one roll of tape
- Adapter connects duct with Powered Foundation Vent for localized ventilation

	Color	Model	Part No.	CFH	Pcs/Ctn	
Powered Foundation Vents						
Series 6, High Output	Black	TV6LVHPBL		3000 rpm 1.0 amps, 24 volts 11,160 cubic ft./hr.	1	
Series 6, Quiet	Black	TV6LVQPBL		1550 rpm .9 amps, 24 volts 7,200 cubic ft./hr.	1	
Series 5, High Output removable front frame	Black	TV5LVHPBL		3000 rpm 1.0 amps, 24 volts 11,160 cubic ft./hr.	1	
Series 5, Quiet removable front frame	Black	TV5LVQPBL		1550 rpm .9 amps, 24 volts 7,200 cubic ft./hr.	1	
Radon, Quiet	Black	LVRQM		1550 rpm .5 amps, 24 volts 7,200 cubic ft./hr.	1	
Controls Kit			58077		1	
Kit required on all Series 5 and 6 low voltage foundation vents (sold separately)						
Radon Power Supply unit (sold separately)		LVPU	94006		1	

	Color	Model	Pcs/Ctn
Accessories			
Flex Duct 25' section with one roll of tape	Gray	DU	1
Duct Adapter	Black	AD-1	1
Vent Well	Black	VWBL	1
	Brown	VWBR	1
	Gray	VWGR	1




Heavy-Duty Automatic

- Heavy-duty construction
- Premium bi-metal coil
- Honeycomb grill
- 5-year limited warranty


Standard Automatic

- Easy to install, includes hardware
- Bi-metal coil
- 3-year limited warranty


13" x 5" Automatic

- Fits openings 13" x 5"
- Automatic operation
- Fits between 16" OC floor joists
- 3-year limited warranty


Manual Replacement

- Same housing as our automatic vents
- Manual lever instead of automatic coil

	Color	Model	NFA (sq.in.)	Pcs/Ctn	Ctns/Pallet
--	-------	-------	--------------	---------	-------------

Automatic Foundation Vents

Heavy-Duty	Black	STBL	50"	10	16
	Brown	STBR	50"	10	16
	Gray	STGR	50"	10	16
Standard Automatic	Black	RABL	50"	10	16
	Brown	RABR	50"	10	16
	Gray	RAGR	50"	10	16
13" x 5" Automatic	Gray	ST2GR	40"	12	16

Manual Replacement Foundation Vent

Manual Replacement	Black	RMBL	50"	10	16
	Brown	RMBR	50"	10	16

BLACK BROWN GRAY





Heavy-Duty Slider

- Heavy-duty solid plastic construction
- Aluminum screen
- Standard 16" x 8"




Accordion Damper

- Folding damper
- Standard 16" x 8"



Damper/Slider

- Our best selling damper and slider
- Standard 16" x 8"




Jumbo Vents

- Slider or Damper
- 16" x 9"
- Designed for use with oversized bricks

	Color	Model	Part No.	NFA (sq.in.)	Pcs/Ctn	Ctns/Pallet
--	-------	-------	----------	--------------	---------	-------------

Manual Foundation Vents - Plastic

Heavy-Duty Slider	Black	303BL		42"	12	50
	Brown	303BR		42"	12	50
	Gray	303GR		42"	12	50
Accordion Damper	Black	101BL		68"	12	50
Damper	Black	PLDPBL	93800	64"	12	35
Slider	Black	PLSLBL	93805	45"	12	35
	Brown	PLSLBR	93806	45"	12	35
	Gray	PLSLGR	93807	45"	12	35
Jumbo Vent Slider	Black	JMSLBL	93808	60"	12	28
Jumbo Vent Damper	Black	JMDPBL	93809	78"	12	28

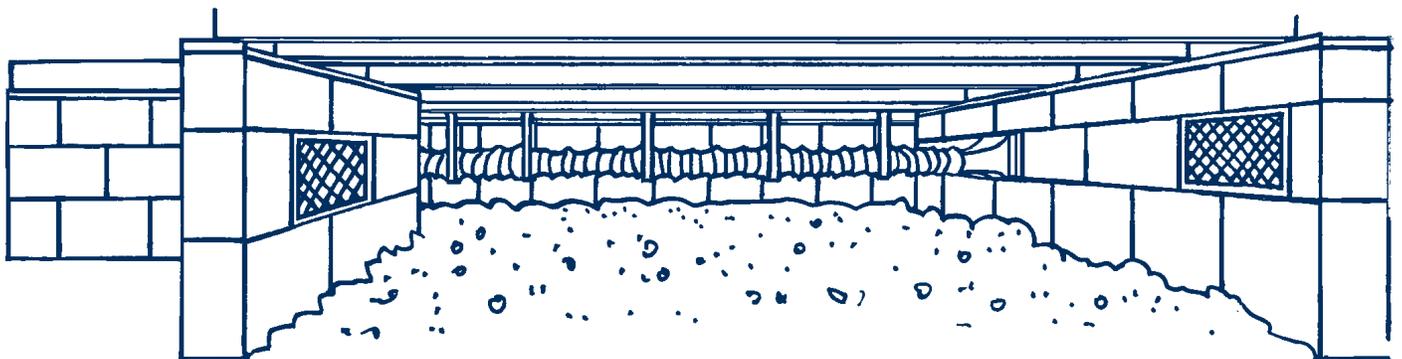

The powered duct system provides targeted ventilation to problem or hard-to-reach areas.

BLACK BROWN GRAY






Multi-Purpose Vent

- 12" x 7"
- Plastic
- Fits openings 11" x 6"



Aluminum Manual Vents

- 16" x 8"
- Can be shipped UPS
- Cast aluminum construction



Stamped Aluminum

- Aluminum screen
- Adjustable sliding damper



Galvanized Block

- 16" x 8"
- Can be shipped UPS

	Color	Model	Part No.	NFA (sq.in.)	Pcs/Ctn	Ctns/Pallet	
--	-------	-------	----------	--------------	---------	-------------	--


Manual Foundation Vents - Plastic

Multi-Purpose Vent	Black	MPBL		23"	12	84	
	Gray	MPGR		23"	12	84	

Manual Foundation Vents - Metal


Aluminum Slider with Lintel	Mill	ALSL	86159	45"	12	24	
Aluminum Damper with Lintel	Mill	ALDP	86135	63"	12	48	
Stamped Aluminum	Mill	FA109	FA109000	36"	12	60	
Stamped Aluminum for Wood	Mill	FA109WD	FA109WD0	36"	12	60	
Galvanized Block	Galv.	GBV	92000	82"	6	35	

Ventilation is a system of intake and exhaust. Vents should be installed on all sides of the crawlspace to allow a free flow of air through the space.

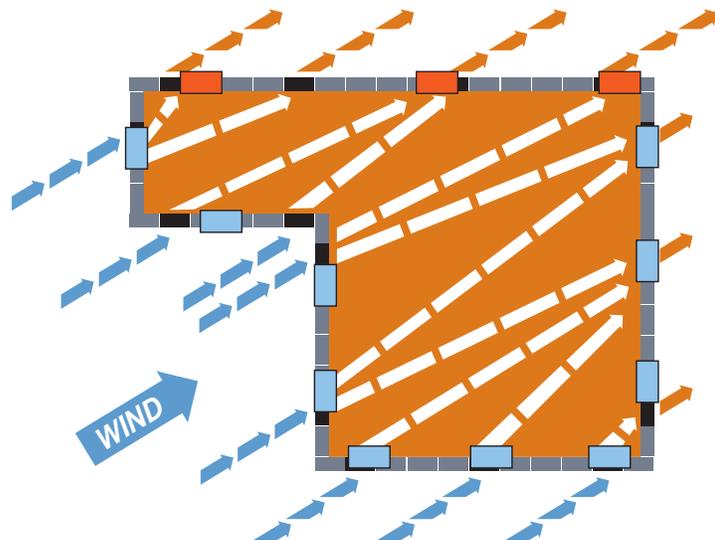

Shinglevent[®] II

SHINGLE-OVER RIDGE VENT

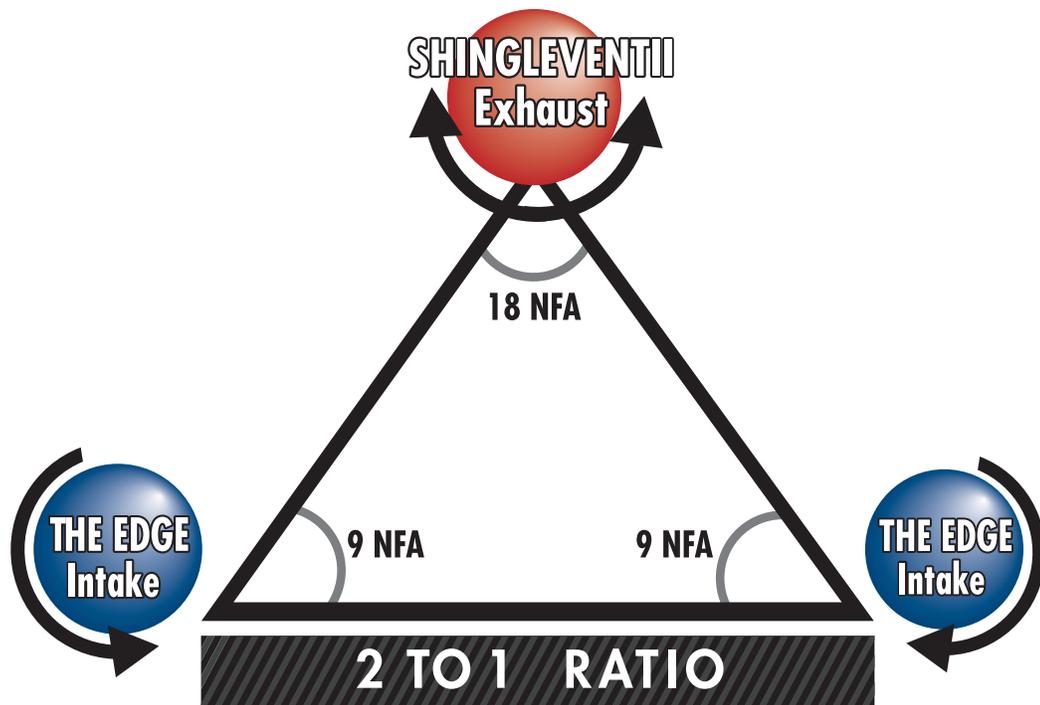

THE BALANCED SYSTEM[®]
FOR ATTIC VENTILATION



Customer Service: 1-800-AIR-VENT (247-8368) • Fax: 1-800-635-7006

www.airvent.com • ventilation@gibraltar1.com

A GIBRALTAR INDUSTRIES COMPANY  AV1101P - 6/2014 © 2014 Air Vent, Inc.